

US 41 Witzel Avenue Overpass: Preliminary Work

Schedule:

August 2009 to October 2010

Location:

Washburn Street, Witzel Avenue,
Koeller Street, and Rath Lane

About the US 41 Project:


Construction work on the US 41 Project will span over 17 miles of highway in Winnebago County from 2009-2016, and 14 miles in Brown County from 2010-2016.

The project includes:

- traffic lanes expanded from four to six-ten lanes
- reconstruction of 13 interchanges
- improvements to 16 interchanges
- 44 roundabouts
- 17 traffic cameras installed
- widening the Lake Butte des Morts Causeway to eight lanes, plus a bike/pedestrian trail with fishing access

Questions?

- Visit the project website online at www.US41wisconsin.gov
- Call the project hotline at: (920) 492-4120

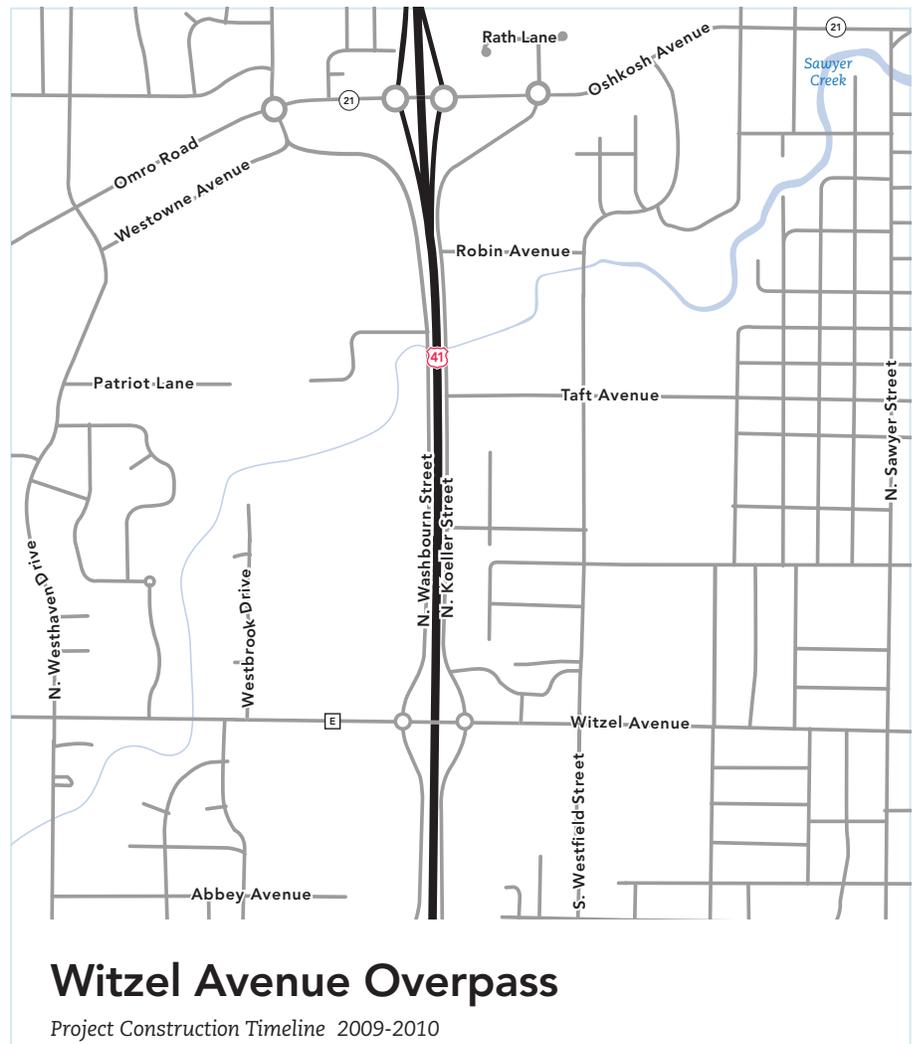

This project involves the demolition and reconstruction of the bridges on **North Koeller Street** and **Washburn Street** over **Sawyer Creek**, the realignment and reconstruction of **Rath Lane/North Koeller Street**, the reconstruction and realignment of the **Washburn Street** frontage road, the demolition and reconstruction of the **Witzel Overpass** over **US 41**, and the construction of two roundabouts and three retaining walls at the **Witzel/Washburn** and **Witzel/Koeller** intersections.

In August-September 2009, construction began on the new bridge

structure and approaches following the demolition of the existing structure. Construction began on the new **North Koeller Street** and **Rath Lane** including erosion control, clearing and grubbing. A storm sewer was placed along **WIS 21** from the **US 41** entrance ramp east to the intersection of the new **North Koeller Street**. Traffic signal wiring, curb and gutter work, and asphaltic pavement work were also completed.


Through mid-November 2009, work is scheduled to be completed on the

(Over)

US 41 Witzel Avenue Overpass: Preliminary Work

Schedule:
August 2009 to October 2010

Location:
Washburn Street, Witzel Avenue, Koeller Street, and Rath Lane

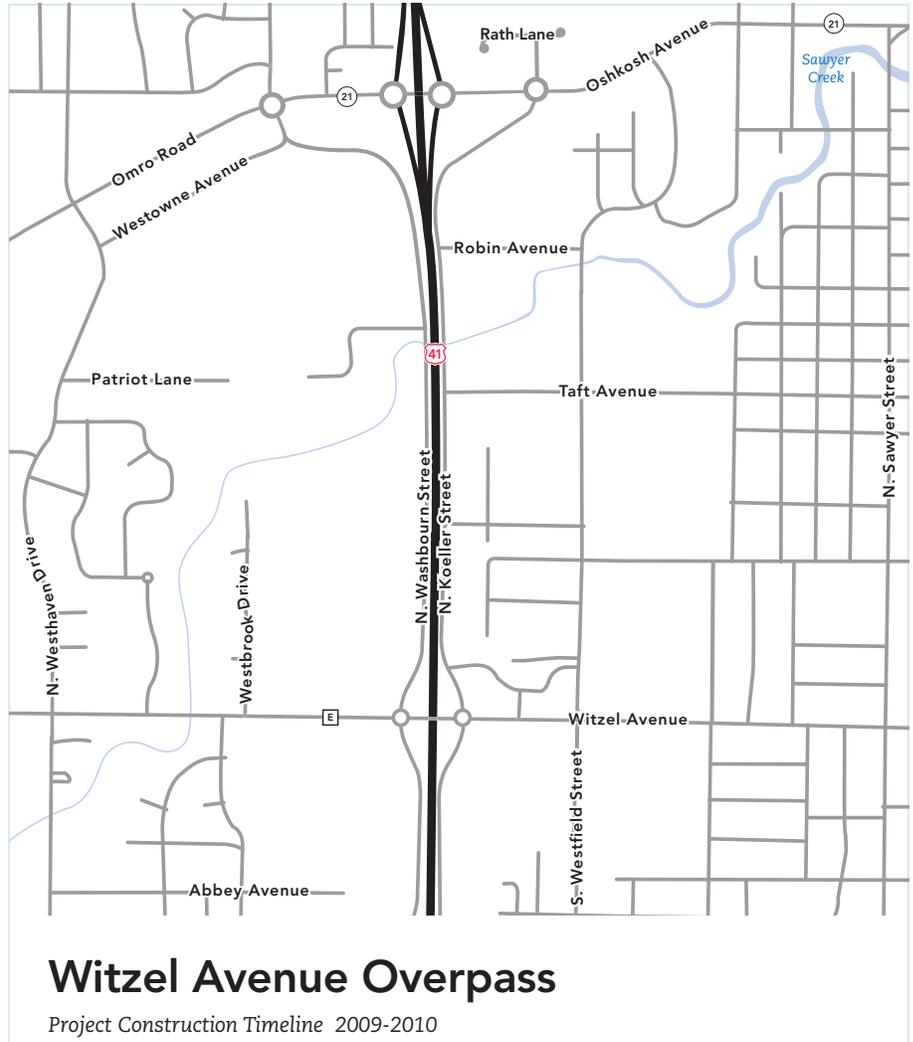

Continued from Page 1

Washburn Street bridge over **Sawyer Creek**. Two-way traffic will be able to go around the bridge via a temporary bypass adjacent to the existing structure. Traffic may have to be flagged when construction activities are adjacent to the existing road.

From October through November, 2009, the west half of **Washburn Street** will be constructed to concrete pavement between Lowes and Pommeraning Dodge-Jeep.

Traffic impacts: The construction of **North Koeller Street** and **Rath Lane** will have minimal impacts upon traffic. Southbound **US 41** traffic will be impacted by a shoulder closure mid-November, 2009. Traffic on **Washburn Street** will be slightly inconvenienced by implementation of a temporary driving lane of asphalt and bridge bypass, as well as possible flagging instances for various construction operations.